

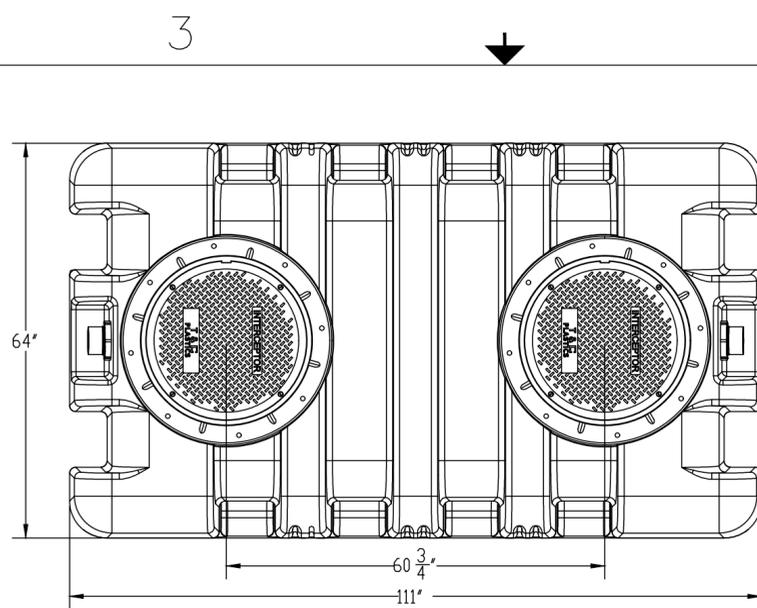
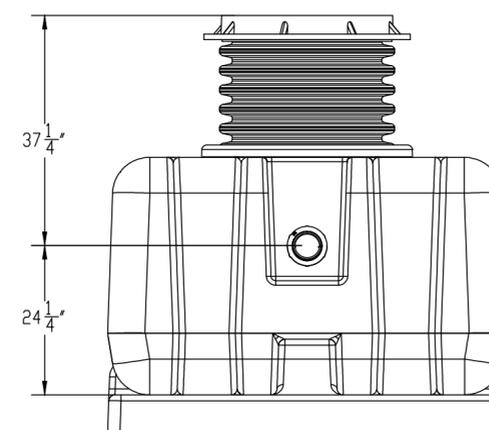
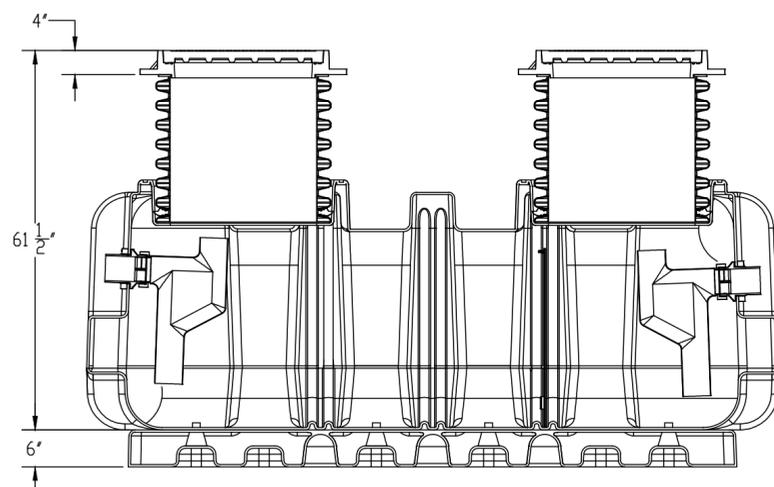
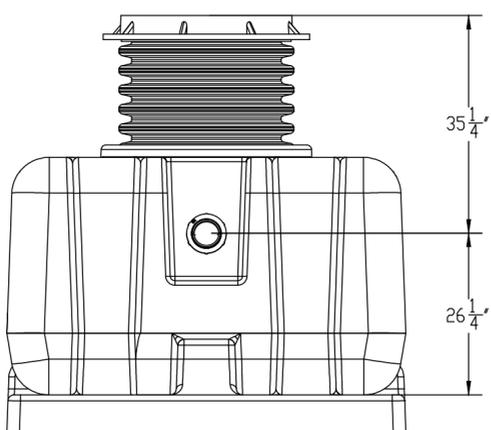
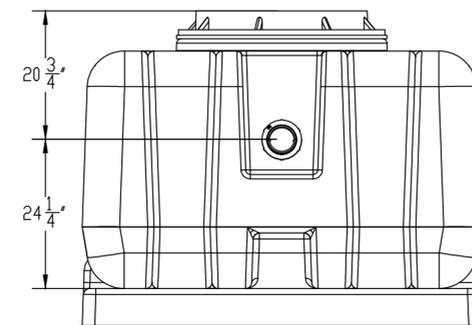


- **GI-SS-500 Liquid Capacity = 500 gallons.**
- **Grease capacity at 100 gpm = 3,492 lbs.**
- **Grease capacity at 250 gpm = 1,916 lbs.**
- **Certified by CSA and IAPMO to ASME A112.14.3, CSA B481, and ANSI Z1001**
- **Approved installation to ASME A112.14.3 Type C**
- **Factory installed internal piping.**
- **3/8" thick seamless high density polyethylene.**
- **Full internal access through lids.**
- **Vent not required for proper operation.**
- **Designed for above or below ground installations.**
- **Integral Anti-siphon Air Relief port.**
- **H<sup>2</sup>O Covers Standard.**
- **Maximum Temperature 190<sup>o</sup> continuous.**

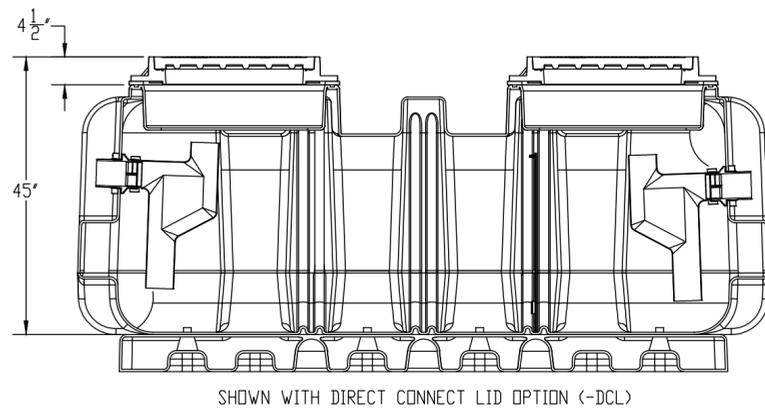

| Suffix | Optional Variations  |
|--------|--|
| -AK    | High water anchor kit (set of two)   |
| -C     | Lid Extension (specify dimension required)   |
| -COA   | Coalescer Pack   |
| -DI    | Ductile Iron lid & collar  |
| -DP    | Dosing Pump  |
| -EP    | Enzymy Port  |
| -FL-C  | Membrane clamp kit   |
| -F6    | 6" No Hub Inlet / Outlet connection (flow rate of 700 GPM with 6" connection)                  |
| -HLA   | High level alarm and float switch (to be installed on site)                                    |
| -LHSI  | 4" no hub inlet on left hand side  |
| -LHSO  | 4" no hub outlet on left hand side   |
| -PDI   | PDI plate and external vented flow control fitting to meet PCI Standards                       |
| -RHSI  | 4" no hub inlet on right hand side   |
| -RHSO  | 4" no hub outlet on right hand side  |
| -RPO   | 4" Remote pump outlet connections on top of interceptor - specify location and number required |
| -SB    | Sediment Bucket  |
| -SP    | External Sample Port (for existing construction. Inlet and Outlet on the same level)           |
| -SP-OF | External Sample Port (for new construction. Inlet higher than the outlet)                      |
| -SST   | Fire resistant fabricated stainless steel interceptor  |
| -ST    | Fire resistant fabricated 10 guage powder epoxy coated steel interceptor                       |
| -V     | Vent connection - 4" (specify number required and location - side and / or top)                |

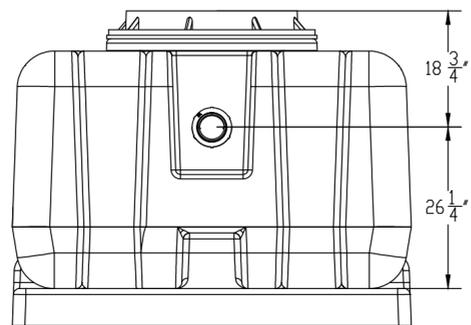

|  |                              |         |          |                         |                  |  |              |
|--|------------------------------|---------|----------|-------------------------|------------------|--|--------------|
| UNLESS STATED OTHERWISE DIMENSIONS ARE IN INCHES   | MATERIAL: <b>HDPE</b>        |         |          | TITLE: <b>GI-SS-500</b> | REV:             | <br><b>T&amp;C PLASTICS</b><br>WWW.TANDCPLASTICS.COM<br>732-780-5300 |              |
|  | WEIGHT [lb]: <b>950 lbs.</b> | DRAWN   | NAME: DR |                         | DATE: 01/02/2023 |  | SHEET 1 OF 1 |
|  | DO NOT SCALE DRAWING         | CHECKED |          |                         |                  |  | SCALE: 1:2   |
| THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TOWN & COUNTRY PLASTICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TOWN & PLASTICS LLC IS PROHIBITED. |                              |         |          |                         |                  |  |              |