


Specification: T&C Plastics SS-_____ gravity grease interceptor with _____ U.S. gallons of liquid holding capacity has a limited lifetime warranty and is made in the U.S.A. out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor is designed for above or below ground installation and includes an adjustable lid system, sample port access, internal baffle, deep seal trap covered by lid, internal air relief by-pass, stainless steel calibrated orifice plate (internal flow control), base for support and floor level installation and 4" no hub inlet and outlet connections. Steel encased composite lids provide a water / gas tight seal and have a minimum of 20,000 LB. load capacity - in accordance with the loading requirements of AASHTO H20. The high density polyethylene material is PE 3135 from Dow 9.39 with a density of 0.939 g/cm³. Note that the interceptor is tested and certified to the ASME A112.14.3, CSA B481 and ANSI Z1001 Standards and listed with I.A.P.M.O. For indoor/outdoor use.

Function: Used in restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the waste water. All T&C gravity interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

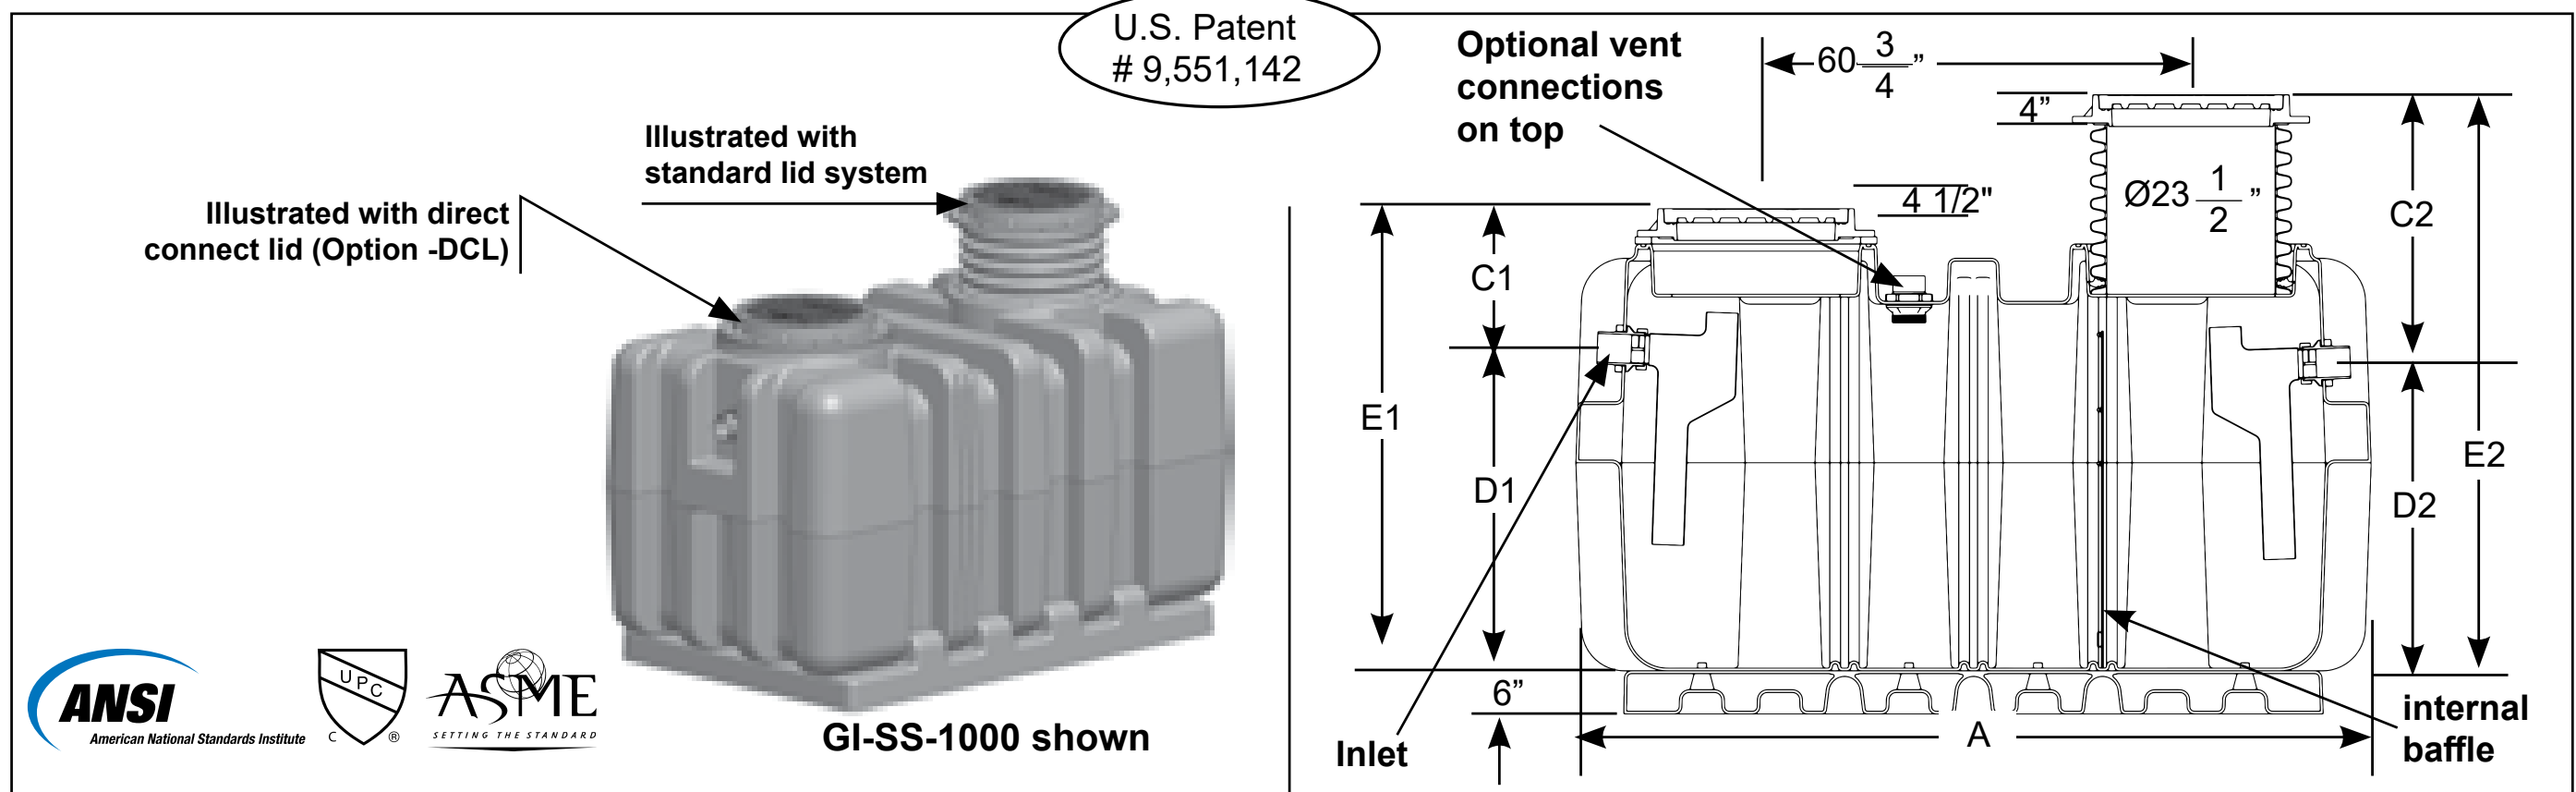

Suffix	Optional Variations	Suffix	Optional Variations
-AK	Anchor Kit for all SS Units	-POK	Remote Pump Out Kit
-C	Lid Extension (specify dimension required)	-RHSI	4" no hub inlet on right hand side
-COA	Coalescer Pack	-RHSO	4" no hub outlet on right hand side
-DI	Ductile Iron lid & collar	-RPO	4" Remote pump outlet connections on top of interceptor - specify location and numbe required
-EP	Enzymy Port	-SB	Sediment Bucket
-FL-C	Membrane clamp kit	-SP	External sampling port - inline, high connections
-F6	6" No Hub Inlet / Outlet connection (flow rate of 700 GPM with 6" connection)	-SP-L	External sampling port - inline, low connections
-F8	8" No Hub Inlet / Outlet connection (fabricated stainless steel) (flow rate of 1,200 GPM with 8" connections)	-SP-OF	External sampling port - offset
-HLA	High level alarm and float switch (to be installed on site)	-SST	Fire resistant fabricated stainless steel interceptor
-LHSI	4" no hub inlet on left hand side	-V	Vent connection - 4" (specify number required and location - side and / or top)
-LHSO	4" no hub outlet on left hand side	-3	Stainless steel veneer bolted to top of ductile iron grates

UNLESS STATED OTHERWISE DIMENSIONS ARE IN INCHES	MATERIAL: HDPE		TITLE: SS Series Gravity Grease Interceptor		SERIES: SS SERIES	REV:	 T&C PLASTICS WWW.TANDCPLASTICS.COM 732-780-5300
	WEIGHT [lb]:	NAME	DATE		SHEET 1 OF 1	SIZE:	
	DO NOT SCALE DRAWING	DRAWN	DR	11/15/2022		SCALE: 1:2	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TOWN & COUNTRY PLASTICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TOWN & COUNTRY PLASTICS LLC IS PROHIBITED.