
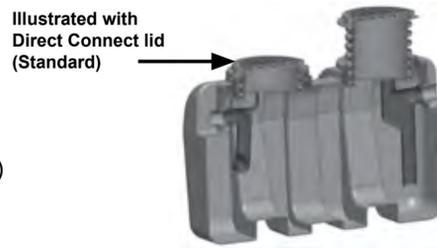


# T&C XL Series

## 50, 75 and 100 GPM HDPE Grease Interceptors

Specification: Town & Country Plastics Series \_\_\_\_ HDPE rotational molded grease interceptor with flow rating of \_\_\_\_ (indicate) and liquid holding capacity of \_\_\_\_ (indicate). Unit shall include: 3/8" uniform wall thickness, deep seal trap covered by lid, internal air relief by-pass, adjustable lid system, stainless steel calibrated orifice plate (internal flow control), sample port access and 4" no hub inlet and outlet connections. Steel encased composite lid provides a water / gas tight seal and has a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20. Interceptor shall be tested and certified to the P.D.I. Standard PDI-G101 (when installed with an external, vented flow control fitting), CSA B481, A.S.M.E. A112.14.3 and listed with T&C grease interceptors are also in compliance with International Plumbing Code (I.P.C.) / I.C.C. by I.A.P.M.O.




Function: Used in restaurants, kitchens, institutional and industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the waste water. Typically installed either on or into the floor. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it). Regular maintenance is required to keep the interceptor functioning. All XL interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

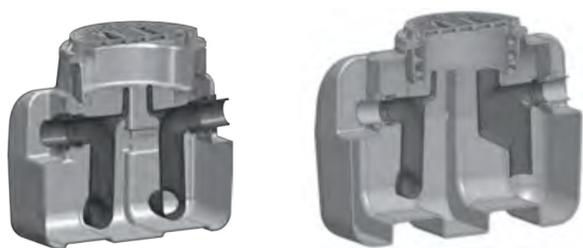

U.S. Patent  
# 9,551,142




PDI approved when shipped with an external, vented low control fitting

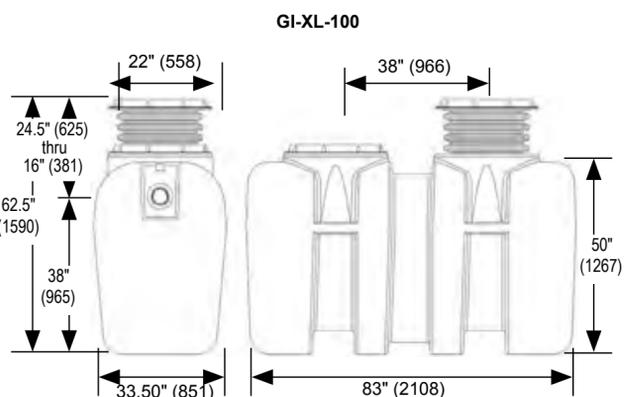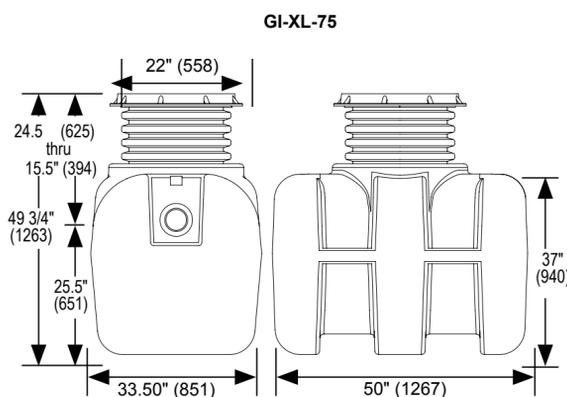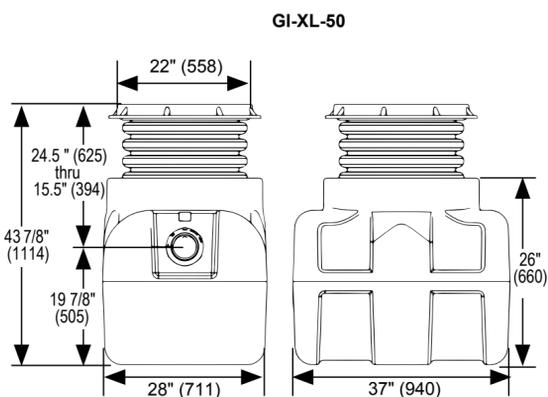

Model No.	Flow Rate (GPM)	Grease Design Capacity	Liquid Holding Capacity (Gallons / Cu. Ft.)	Sediment Capacity (Gallons)	B Width	Shipping Weight (lbs.)
GI-XL-50	50	250 Lbs. (35 Gallons)	55 / 7.19	28	28.00"	92
GI-XL-75	75	501 Lbs. (70 Gallons)	140 / 18.6	42	33.50"	150
GI-XL-100	100	1,556 Lbs. (218 Gallons)	300 / 40	115	33.50"	275

XL models only meet PDI Standards when installed with an external, vented flow control fitting.

OPTIONAL VARIATIONS	PART NO.
Anchor kit for XL Series	XL-AK
Lid Extension - up to 44" high - for XL Series	XL-EXT-44
Lid Extension - up to 72" high - for XL Series	XL-EXT-72
6" no hub inlet and outlet - for each piece (two pieces required)	XL-F6
High level alarm and float switch (to be installed on site)	XL-HLA
Remote pump out kit (also includes Remote Pump Out (-RPO))	XL-RPOK
3" Remote pump outlet connections on top of interceptor - specify location and number required	XL-RPO
Sediment bucket - for XL-50	SB-50
Sediment bucket - for XL-75	SB-75
Sediment bucket - for XL-100	SB-100
External sampling port - inline, high connections	XL-SP-H
External sampling port - inline, low connections	XL-SP-L
External sampling port - offset	XL-SP-OF

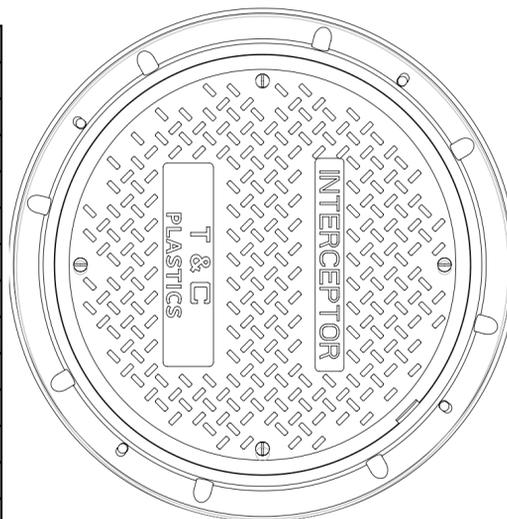

UNLESS STATED OTHERWISE DIMENSIONS ARE IN INCHES	MATERIAL: HDPE		TITLE: XL SERIES GREASE INTERCEPTORS		SERIES: XL SERIES	REV:	 WWW.TANDCPLASTICS.COM 732-780-5300
	WEIGHT [lb]:		NAME: DRAWN DR	DATE: 11/15/2022	SHEET 1 OF 1	SIZE:	
	DO NOT SCALE DRAWING		CHECKED:		SCALE: 1:2		

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TOWN & COUNTRY PLASTICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TOWN & COUNTRY PLASTICS LLC IS PROHIBITED.